

# The New dina meri®

This package contains the following parts,



1 STAR BASE (A)\*

\*The round ring is only for model 910/911/912& 916's



5 CASTERS (B)



1 GAS LIFT PUMP (C)



1 SEAT WITH PLATE (D)



1 "J" BAR FOR BACK SUPPORT (E)\*  
For model 910/912/915PBS/916PBS/920



1 BACK SUPPORT (F)\*  
For model 910/912  
915PBS/916PBS/920



1 HINGE (G)  
For Back support




2 BOLTS (H)  
For Hinge



2 KNOBS (I)  
1 For seat plate  
1 For back support

## STEP 1

Insert Casters (B) into Base (A) and press firmly.

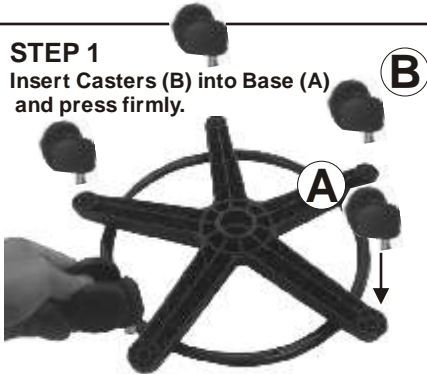


(B)

(A)

## STEP 3

If your stool/chair has a back support, skip this step for now and proceed to step 4, otherwise insert Seat with Plate (D) into Base (A) and press firmly.

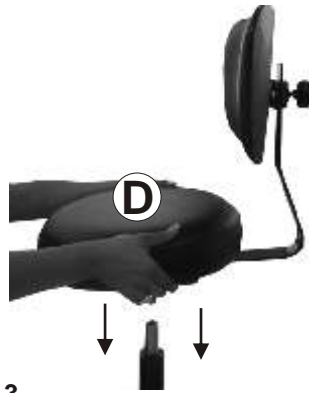

(D)

## TO OPERATE GAS LIFT PUMP TO LOWER:

Sit on the chair/stool and lift the side lever located under the seat, the chair/stool will go down.

TO RAISE: Stand away from the unit and lift the lever and adjust to the desired height. (the gas lift is not designed to lift the weight of a person, therefore you should not put weight on seat while adjusting)




(C)

STEP 2  
Insert Gas Lift Pump (C) into Base (A)

(A)

## STEP 4

If your chair/stool is equipped with a back support, install Hinge (G) using 2 bolts (H) and tighten with a Philip screwdriver.

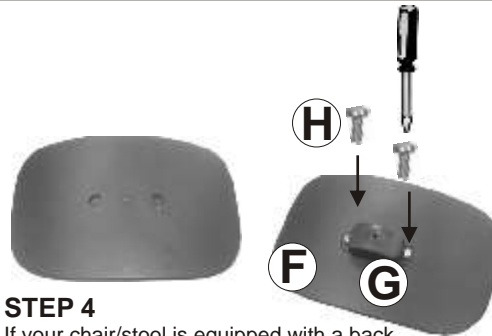


(H)

(F)

(G)

## STEP 5


Slide "J" bar (E) into Hinge, insert Knob (I) and tighten. You can re-adjust height of the back later on by loosening the knob & sliding the back support up or down until you reach the desired position.



(I)

## STEP 6

Slide the other end of the "J" bar (E) with the hole into seat plate, insert Knob (I) and tighten. You can re-adjust the back later on by loosening the knob and sliding the back support in or out until you reach the desired position. Refer to Step 3 to install the seat.



(D)

(E)

# ENJOY!

